

THE WORLD OF CRANE COMPONENTS



TITAN

WHEEL SET SERIES KG 130

 ALWAYS RELIABLE. ALWAYS THE NUMBER ONE CHOICE.


TITAN

ALWAYS RELIABLE. ALWAYS THE NUMBER ONE CHOICE.

KARL GEORG WHEEL SETS move the WORLD

Crane system; roof construction or stadium turf; Ice cold or highly explosive;
Fast or slow; Cleanroom or extremely harsh environment!


ALL INDUSTRIES — LOTS OF APPLICATIONS




AUTOMOTIVE
Automotive engineering, autonomous driving and subcontracting



ENERGY SECTOR
Wind power, solar power, hydropower, geothermal power and biomass



PLANT ENGINEERING
Process engineering, power engineering, supply engineering and production engineering, etc.



MINING
Exploration, extraction and movement of mineral resources



ENTERTAINMENT
Commercial roofs, stage technology, stadium turf etc.



CONVEYOR SYSTEMS
Upstream/downstream, onshore/offshore production, LNG/H² transport



SMELTING WORKS
Steel production, metal production and processing



CRANE ENGINEERING
Industrial cranes, process cranes, container handling

WHEEL SET SYSTEM TITAN

Optimally graduated sizes in a modular system, compact dimensions, crane wheels from Ø160mm to Ø630mm, fast and economical, ready to install, with a load range of up to 60t.

All components and interfaces are perfectly coordinated.

AT A GLANCE



-30 °C TO +200 °C



UP TO 60T



HIGH AVAILABILITY



SIMPLE INSTALLATION



FLEXIBLE DRIVE SELECTION

DISCOVER THE STRONG SOLUTION FOR YOUR BUSINESS:

Our well-proven wheel set system **TITAN** - for crane engineering, industry, mechanical engineering and plant construction. With the modular, easy-to-maintain and robust design that always fits, we ensure safe and durable movements of heavy loads with the simplest assembly and the longest service life.


ALLOW YOURSELF FREEDOM AND DECIDE FOR YOURSELF:

For the driven wheelset as an individual or central drive, offset and angular geared motors are available from the kits of all manufacturers. With us, you determine your drive and are free to choose the drive manufacturer. Enjoy maximum flexibility and freedom with our innovative drive solutions.

WE GUARANTEE NO COMPROMISES

Our innovative wheel set system offers you the highest flexibility and maximum benefit for your plant. Our dynamically heavy-duty components are available in many installation variants: pre-assembled or in individual parts, with and without flange bearings for installation in hollow sections or box girders. In the "corner bearing" design, installation and removal of the wheel sets is particularly fast and uncomplicated.

All wheel sets are equipped with robust, above-average long-life and lifetime-lubricated brand spherical roller bearings that meet the requirements of the temperature range from -30°C to +200°C. The option of relubrication is already available for all designs and sizes.

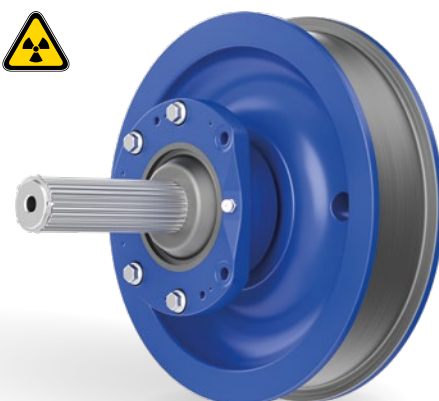

WE HOLD FIRM AND REMAIN FLEXIBLE

All external dimensions and interfaces to the steel structure, including the fastening elements, are compatible with similar competitive designs (e.g. DEMAG RAE/RNE, DWS).

WE SAY „YES“!

From project planning to commissioning, we at Karl Georg are at your side as needed. We are happy to advise and support you and also offer our wheelsets in exchange for competitor products. We are happy to recommend the economically and technically "best solution" for you and deliver quickly and reliably.

WE MANUFACTURE WITH SOLAR ENERGY FROM OUR OWN PRODUCTION.

With a total output of around 850 kWp, we are not just generating enough energy for our electric vehicle fleet, but also significantly reducing the CO₂ emissions of our production.



WHEEL SET SYSTEM TITAN

Installation variants, running surfaces and grooves

RAE / RNE Nominal size and crane wheel Ø d1 (mm)	Maximal wheel load	Wheel width b2 (mm)	Wheel tread b1 (mm)	Crane wheel Ø d1 h9 (mm)	Outer Ø d2 (mm)	L5 (mm)	L6 (mm)	f2 (mm)	L12 (mm)	L8 (mm)	Ø DFI (mm)	Ø DS (mm)	Ø DB f8 (mm)	L7 (mm) ^{*1}	XY +/- (mm)
160	8.800	100	max. 75	160	190	170	215	10-15	15	148	150	130	110	130	4,5
200	11.200	100	max. 75	200	230	170	215	10-15	15	148	150	130	110	130	4,5
250	16.000	110	max. 80	250	282	220	275	14-20	15	181	230	200	170	160	4,5
315	22.000	125	max. 90	315	350	250	306	14-20	15	211	230	200	170	180	4,5
400	28.000	125	60 - 90	400	440	280	362	15-32	28	179	280	250	210	210	10
		140	85-105												
500	40.000	140	60-100	500	540	320	402	20-32	28	224,4	280	250	210	230	10
		170	95-130												
630	60.000	170	75-130	630	680	350	463	24-35	36	280,6	370	250	268	250	12
		210	100-160												

*1 = L7, other dimensions possible

WHEEL SET SYSTEM TITAN

Crane wheel material and installation sizes

CRANE WHEEL MATERIAL:

Spheroidal graphite iron
(EN-GJS-700-2)

ALTERNATIVELY:

Solid material or binding

- 42CrMo4+QT
34CrNiMo6+QT
- Stainless Steel
- CuAl-xx (Bronze)
- Polyamide PA12 G
- Vulkollan®




Installation variant						Wheel Set Series	Weight kg ^{*2}	
	1	2	3	4	5		RAE	RNE
x		x				KG 130	21	19
x			x			KG 130	26	24
x	x	x	x			KG 130	54	52
x	x	x	x			KG 130	74	70
x	x	x	x			KG 130	115	110
x	x	x	x			KG 130	120	115
x	x	x	x	x		KG 130	165	160
x	x	x	x	x		KG 130	175	170
x	x	x	x	x		KG 130	350	340
x	x	x	x	x		KG 130	375	365

*2 = Gewicht variiert nach Ausführung




SIZES AND DIMENSIONS

Wheel set series 160, 200, 250 and 315 for corner bearing installation complete or for box girder installation in individual parts

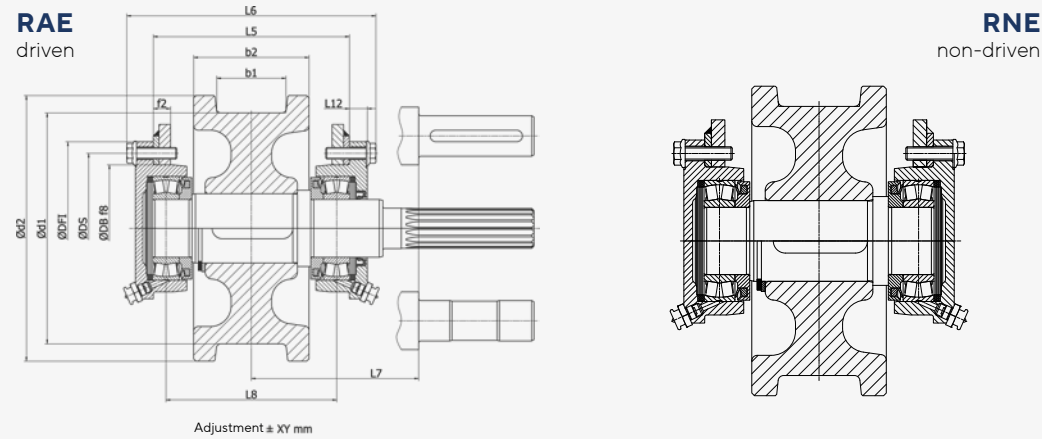

Wheel set series 400, 500 and 630 for corner bearing installation complete or for box girder in individual parts

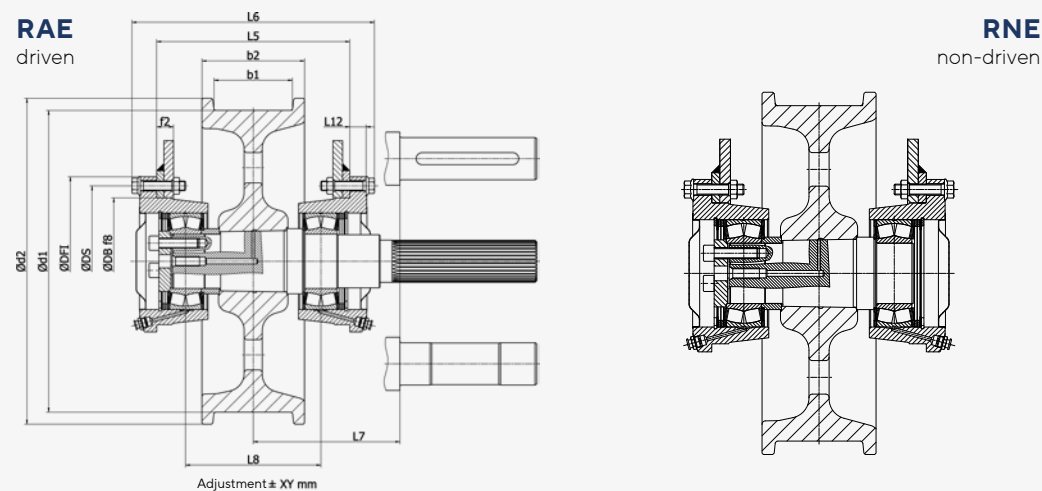


MAXIMUM VARIETY WITH 5 INSTALLATION VARIANTS

VARIANTE 1


Corner bearing installation
Flange centring
machined

TOPSELLER

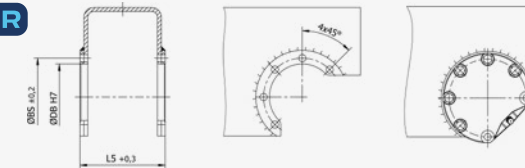


VARIANTE 2

Corner bearing installation
Flange centring
flame cut

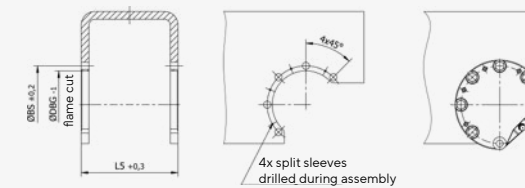


VARIANTE 3

Closed box girder installation
Flange centring
machined

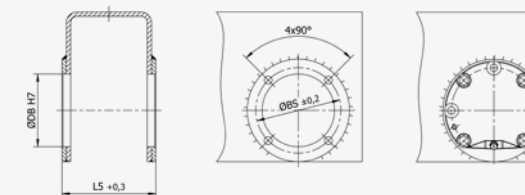


VARIANTE 4

Closed box girder installation
Flange centring
flame cut

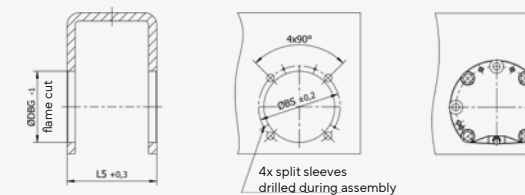


VARIANTE 5

without flange housing
for direct installation in
machined steel construction

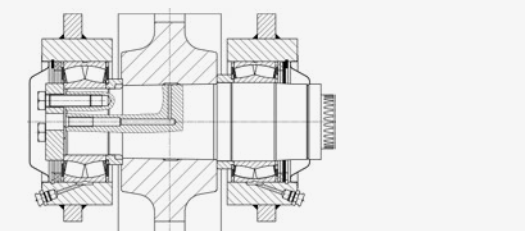

RUNNING SURFACES AND GROOVES

Running surface geometry as required, any crane wheel geometry and groove possible, therefore design suitable for curves is also feasible.

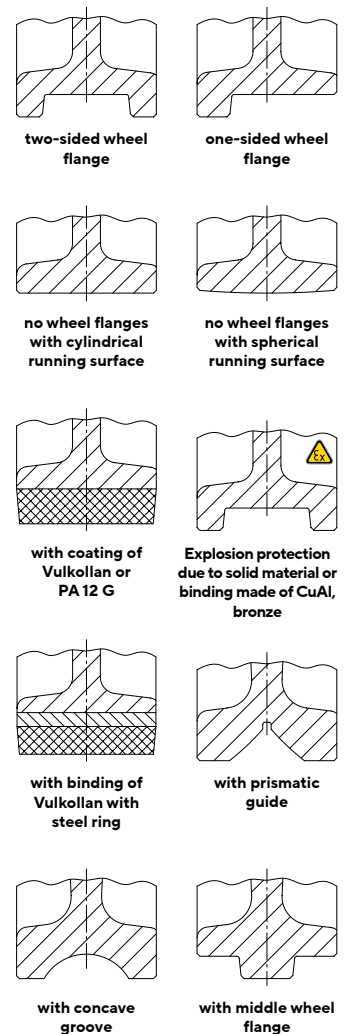

DESIGN KEY

RAE - 400 - 80 / 125 - 1 - ADK70 - W - 75

The design key for the series can be found in the current TITAN catalog.

Further information and technical details can be found in our wheel set catalog at www.karl-georg.de.



* all common drives possible

OUR GENTLE CHOICE

FOR AN "EXTRA" BIT OF SAFETY


"Safety and efficiency" for crane applications: Innovative hydraulic buffers for industrial cranes as the solution for energy absorption.

Industrial buffers "Made in Germany" by Karl Georg offer effective solutions for energy absorption in a variety of applications, such as process cranes, port cranes, in steel plants, mining and much more.

In addition to rubber and cellular buffers, Karl Georg offers a wide range of high performance hydraulic buffers, specially designed to meet the demanding requirements of cranes and capable of absorbing more than 95% of impact energy.

Hydraulic buffers with a max. buffer force of 1,000 kN




and a buffer stroke of 50 to 1,600 mm are available. Standard for an ambient temperature -30 to +100 degrees. In slightly modified version up to -50°C.

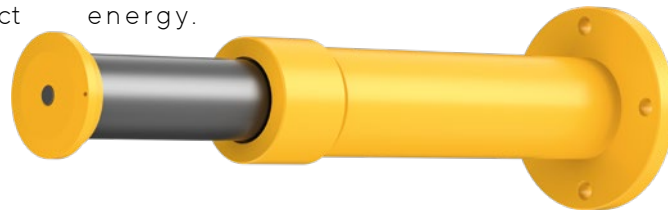


HIGH PERFORMANCE OEM GUIDE ROLLERS

For your safe use with parallel rail head sides from stock. Options for inclined rail head sides as well as additional roller securing are a matter of course for us.

Horizontal force up to 110 kN

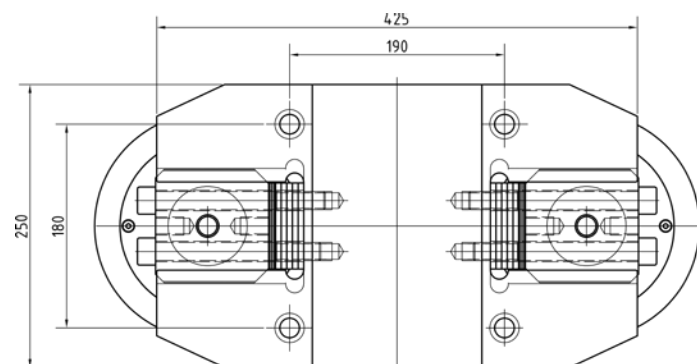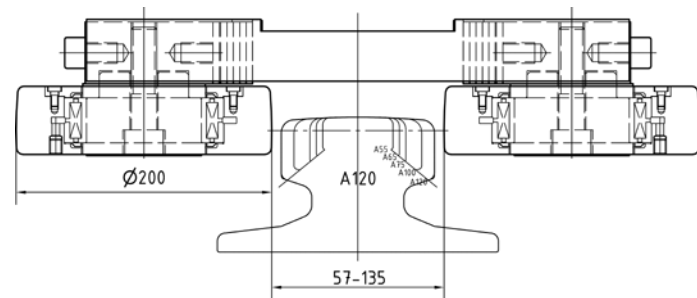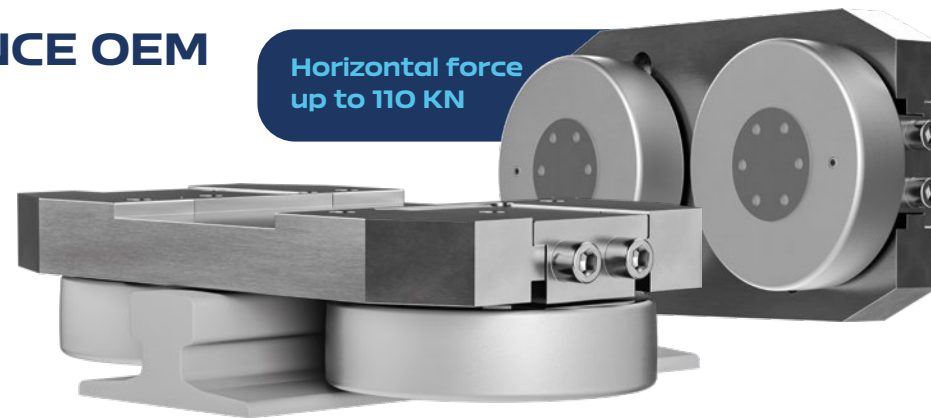

FURTHER OPTIONS

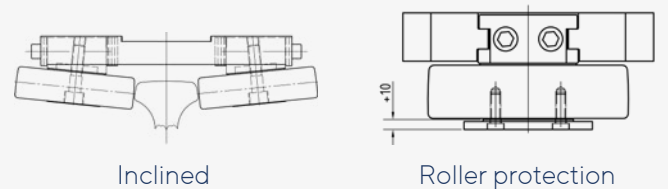

XTREM WE PUSH BOUNDRIES

Thanks to its decades of experience, Karl Georg can offer you a wide range of specific product solutions for particular applications, conditions and interfaces.

Thanks to flexible manufacturing concepts and a high level of vertical integration, we are able to offer customised solutions from a minimum order quantity of just 1 item.


We would be happy to assist you with your project specifications.

- Steel, stainless steel, plastics
- Forged crane wheels
- Special contours and interfaces
- Running surface hardness up to 54HRC, 20 mm deep
- Explosion-proof
- Temperature down to -30 °C
- Temperature up to +200 °C
- Indoor, outdoor, offshore
- Corrosion protection C1 - C5M

ALL STANDARD CRANE WHEEL MATERIALS, SOLID MATERIALS AND COMPOSITE SOLUTIONS.



PERFECTLY COORDINATED ATTACHMENTS AND ACCESSORIES

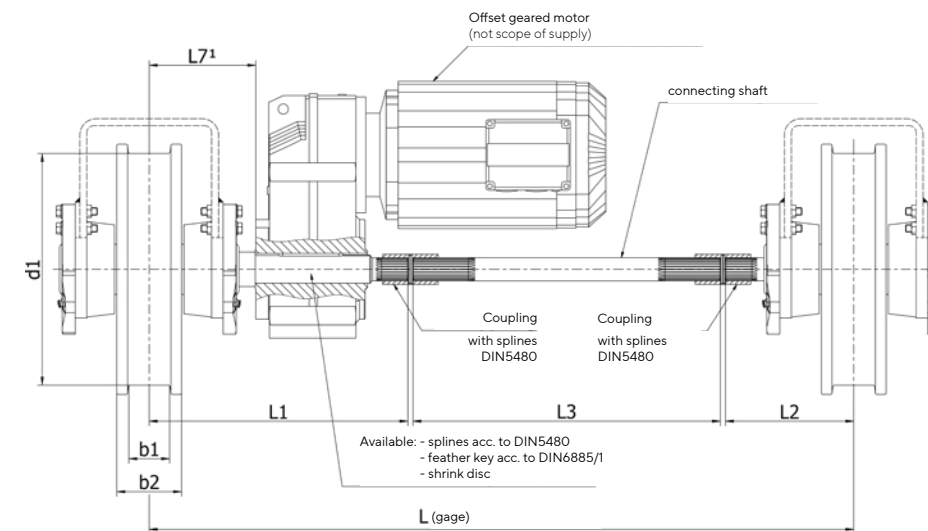

DRIVE SHAFTS SUITABLE FOR THE FOLLOWING TRANSMISSION MANUFACTURERS:


DEMAG · SEW · NORD · STEPHAN · ABB
SIEMENS · ABM GREIFFENBERGER
BONFIGLIOLI · KONESCO · FLENDER
KONECRANES · STAHL CRANESYSTEMS


DRIVE SHAFTS SUITABLE FOR SLIP-ON GEAR MECHANISMS FROM OTHER MANUFACTURERS ON REQUEST.

TAILORED ACCENTS AND CORROSION PROTECTION AS NEEDED

TALK TO US!


Flexibility and creativity are the key features of our products. Innovation is our driving force. No matter what you are planning, we can supply the right product.

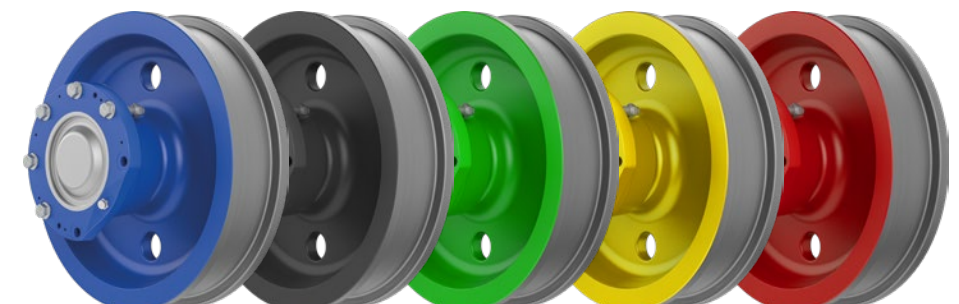

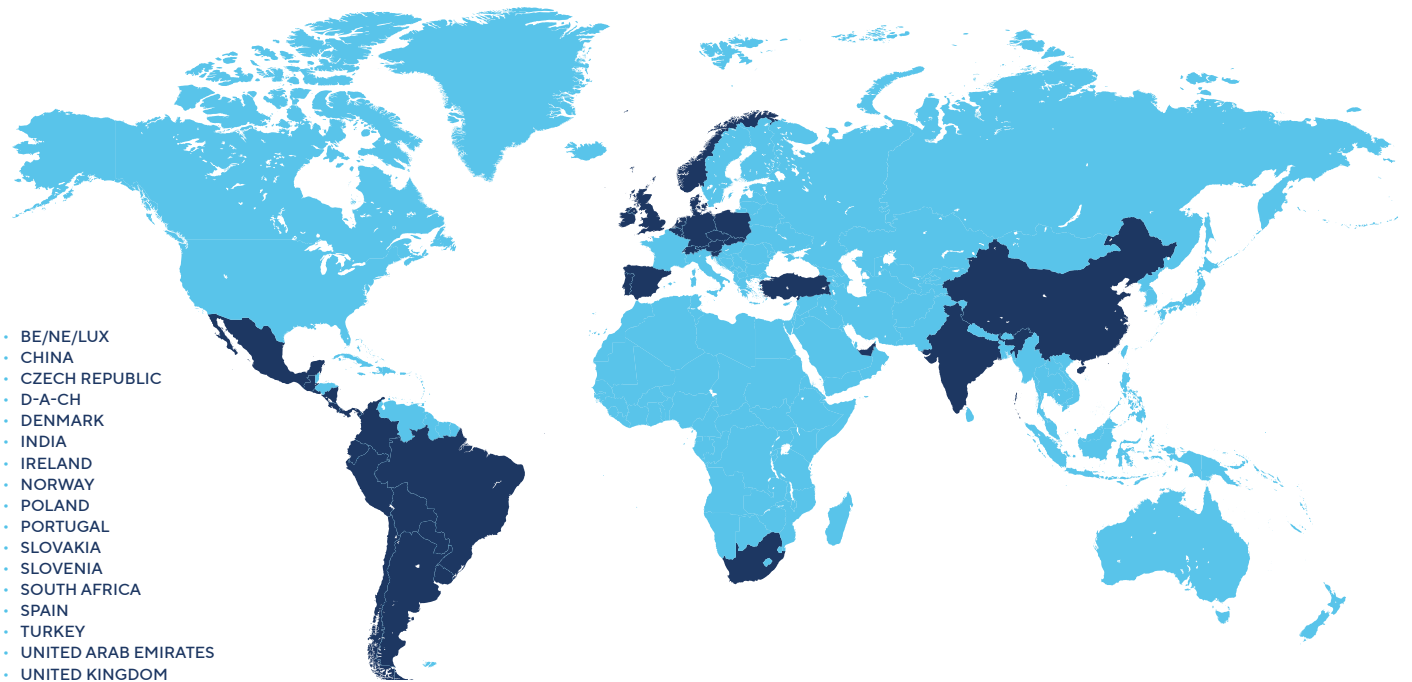

- BE/NE/LUX
- CHINA
- CZECH REPUBLIC
- D-A-CH
- DENMARK
- INDIA
- IRELAND
- NORWAY
- POLAND
- PORTUGAL
- SLOVAKIA
- SLOVENIA
- SOUTH AFRICA
- SPAIN
- TURKEY
- UNITED ARAB EMIRATES
- UNITED KINGDOM

MORE INFORMATION



FOR MORE INFORMATION, PLEASE VISIT OUR WEBSITE KARL-GEORG.DE



KARL GEORG GMBH
Karl-Georg-Straße 3
D-57612 Ingelbach-Bahnhof
T: +49 (0)2688 / 95 16 - 0

info@karl-georg.de
www.karl-georg.de

WE ARE CERTIFIED
TO DIN ISO 9001
AND ISO 14001.



Subject to changes and errors
© 2023 Karl Georg GmbH